



Series 5106 35 – 250 W

tw 130

safety class II

Cross section (W x H) 74 x 66 mm

EEI = A2

Resin encapsulated and vacuum-impregnated

IP 20

All types in various input voltages and 60 Hz version available on request



EN 61347 - 2 - 9
EN 60923

- Terminal with integrated strain relief.
- Number of terminals depending on the model.
- With self-resetting temperature switch .


Technical facts

Pos.	lamp			Ref.-No.	designation	ballast		"L" [mm]	"LA" [mm]	weight about	Capacitor [µF]
	type	power [W]	current [A]			voltage	Δt [K]				
1	HS/HI	35	0,53	5106.0340.300	HIS 35-66.50H-3 TS	230V 50Hz	50	120	89	1,5 kg	6
2	HS/HI	35	0,53	5106.0340.329	HIS 35-66.50H-34 TS	230 / 240V 50Hz	50	120	89	1,5 kg	6
3	HS	50	0,76	5106.0340.301	HS 50-66.55H-3 TS	230V 50Hz	55	120	89	1,5 kg	8
4	HS	50	0,76	5106.0340.330	HS 50-66.60H-34 TS	230 / 240V 50Hz	60	120	89	1,5 kg	8
5	HS/HI	70	1,0	5106.0450.300	HIS 70-66.60H-3 TS	230V 50Hz	60	131	100	1,7 kg	12
6	HS/HI	70	1,0	5106.0450.301	HIS 70-66.65H-34 TS	230 / 240V 50Hz	65	131	100	1,7 kg	12
7	HS/HI	100	1,2	5106.0700.300	HIS 100-66.55H-3 TS	230V 50Hz	55	156	125	2,3 kg	12
8	HS/HI	100	1,2	5106.0700.301	HIS 100-66.60H-34 TS	230 / 240V 50Hz	60	156	125	2,3 kg	12
9	HS/HI	150	1,8	5106.0900.300	HIS 150-66.55H-3 TS	230V 50Hz	55	176	145	2,9 kg	20
10	HS/HI	150	1,8	5106.0900.301	HIS 150-66.60H-34 TS	230 / 240V 50Hz	60	176	145	2,9 kg	20
11	HS/HI	250	3,0	5106.1200.300	HIS 250-66.75H-3 TS	230V 50Hz	75	206	175	3,7 kg	32
12	HS/HI	250	3,0	5106.1200.301	HIS 250-66.80H-34 TS	230 / 240V 50Hz	80	206	175	3,7 kg	32


installation instructions:

- For 1x or 2x double insulated cable for safety class II.
- Outer diameter 3,4-4,8 mm.
- max. stripping 8 mm.
- Distances from side walls min . 3 mm.

dimensions:

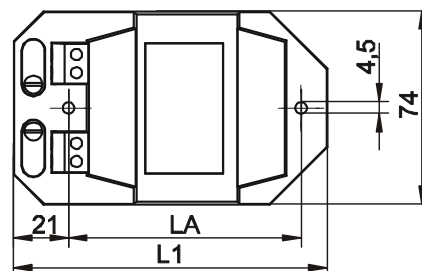

Special construction on request

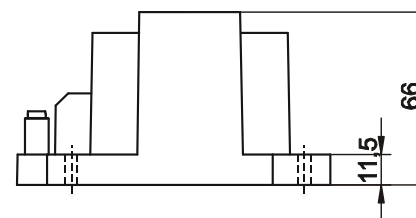

dimensioned drawing on request

wiring:

