



- Terminal with integrated strain relief.
- Number of terminals depending on the model.
- With self-resetting temperature switch

Series 5106 35 – 150 W tw 130
Cross section (W x H) 74 x 66 mm
Resin encapsulated and vacuum-impregnated
All types in various input voltages and 60 Hz version available on request

safety class II
EEI = A2
IP 20



Technical facts


Pos.	lamp			Ref.-No.	designation	ballast					Komp. Kond. [µF]
	type	power [W]	current [A]			voltage	Δt [K]	"L" [mm]	"LA" [mm]	weight about	
1	HS (HI)	50 / (35)	0,76 / (0,53)	5106.0340.301	HS 50/35-66.55H-3 TS	230V 50Hz	55	120	89	1,4 kg	8 / (6)
2	HS (HI)	50 / (35)	0,76 / 0,53	5106.0340.307	HS 50/35-66.60H-34 TS	230 / 240V 50Hz	60	120	89	1,4 kg	8 / (6)
3	HS/HI	70 / (50)	1,0 / (0,76)	5106.0450.303	HIS 70/50-66.70H-3 TS	230V 50Hz	70	131	100	1,7 kg	12 / (8)
4	HS/HI	70 / (50)	1,0 / (0,76)	5106.0450.304	HIS 70/50-66.75H-34 TS	230 / 240V 50Hz	75	131	100	1,7 kg	12 / (8)
5	HS/HI	100 / (70)	1,2 / (1,0)	5106.0700.303	HIS 100/70-66.55H-3 TS	230V 50Hz	55	156	125	2,3 kg	12
6	HS/HI	100 / (70)	1,2 / (1,0)	5106.0700.304	HIS 100/70-66.60H-34 TS	230 / 240V 50Hz	60	156	125	2,3 kg	12
7	HS/HI	150 / (100)	1,8 / (1,2)	5106.1100.300	HIS 150/100-66.70H-3 TS	230V 50Hz	70	196	165	3,4 kg	20 / (12)
8	HS/HI	150 / (100)	1,8 / (1,2)	5106.1100.301	HIS 150/100-66.75H-34 TS	230 / 240V 50Hz	75	196	165	3,4 kg	20 / (12)

Ballasts for wattages (values in brackets) used


installation instructions:

- For 1x or 2x double insulated cable for safety class II.
- Outer diameter 3,4-4,8 mm.
- max. stripping 8 mm.
- Distances from side walls min . 3 mm.

dimensions:

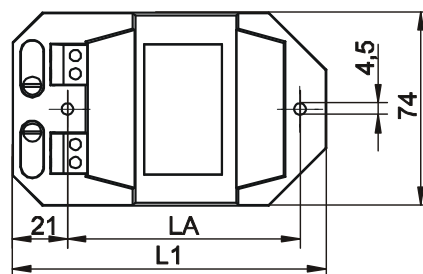

Special construction on request

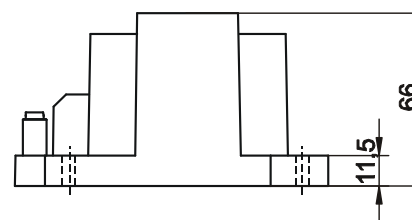

dimensioned drawing on request

wiring:

