





**Vergossene Transformatoren  
 für Feuchträume**  
 Schutzart IP 65 Schutzklasse II




Technische Daten

Art. - Nr.	Spannung Frequenz	Spannung Sekundär [V]	Lampen- Leistung {W}	Typ	"A"	"B"	"C"	"D"	"E"	Gewicht [kg]	TUV GS
5402.0340.422	230V 50-60Hz	11,5	100	I	70,5	50	112	16,3	16,3	2,70	x
5402.0340.413		2x11,5	2 x 50	I	70,5	50	112	16,3	16,3	2,70	x
5402.0340.434		3x11,5	3 x 50	I	70,5	50	112	16,3	16,3	2,70	x
5402.0340.411		11,5	150	I	70,5	50	112	16,3	16,3	2,70	x
5402.0340.412		2x11,5	2 x 75	I	70,5	50	112	16,3	16,3	2,70	x
5109.0450.256		11,5	200	I	70,5	50	112	16,3	16,3	3,00	
5109.0450.257		2x11,5	2 x 100	I	70,5	50	112	16,3	16,3	3,00	
5109.0590.303		11,5	300	I	84,5	64	126	23	23	4,10	x
5109.0590.353		11,5;12,5;13,5	300	I	84,5	64	126	23	23	4,20	x
5109.0590.354		11,5	2 x 175	I	84,5	64	126	23	23	4,20	x

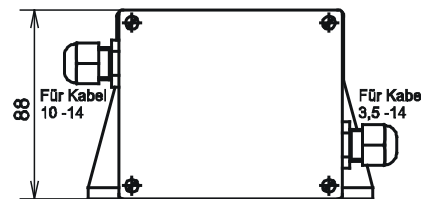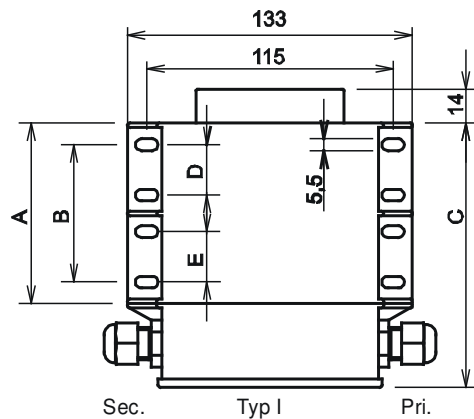

Ansicht auf Anschlusskasten

Prinzipschaltung

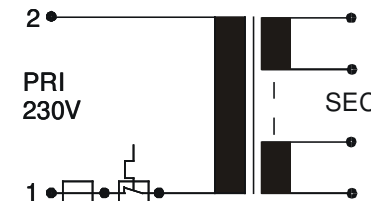

Sonderausführung auf Anfrage  
 Änderungen vorbehalten



Maßzeichnungen auf Anfrage