



- screw terminal 2,5 mm²
- number of terminals depending on the model
- with self-resetting temperature switch

Series 5106 35 – 250 W
Cross section (W x H) 66x56 mm
vacuum impregnated tw 130

safety class I
EEL = A2
IP20


All types in various input voltages and 60 Hz version available on request



Technical facts

Pos.	lamp			Ref.-No.	designation	ballast					Capacitor [µF]
	type	power [W]	current [A]			voltage	Δt [K]	"L" [mm]	"LA" [mm]	weight about	
1	HS/HI	35	0,53	5106.0340.100	HIS 35-66.50-3TS	230V 50Hz	50	105	85	1,1 kg	6
2	HS/HI	35	0,53	5106.0340.101	HIS 35-66.55-34TS	230/240V 50Hz	55	105	85	1,1 kg	6
3	HS	50	0,76	5106.0340.103	HS 50-66.65-3TS	230V 50Hz	65	105	85	1,1 kg	8
4	HS	50	0,76	5106.0340.104	HS 50-66.70-34TS	230/240V 50Hz	70	105	85	1,1 kg	8
5	HS/HI	70	1,0	5106.0450.100	HIS 70-66.70-3TS	230V 50Hz	70	115	95	1,4 kg	12
6	HS/HI	70	1,0	5106.0450.101	HIS 70-66.75-34TS	230/240V 50Hz	75	115	95	1,4 kg	12
7	HS/HI	100	1,2	5106.0700.100	HIS 100-66.60-3TS	230V 50Hz	60	140	120	2,0 kg	12
8	HS/HI	100	1,2	5106.0700.101	HIS 100-66.65-34TS	230/240V 50Hz	65	140	120	2,0 kg	12
9	HS/HI	150	1,8	5106.0900.100	HIS 150-66.60-3TS	230V 50Hz	60	160	140	2,5 kg	20
10	HS/HI	150	1,8	5106.0900.101	HIS 150-66.65-34TS	230/240V 50Hz	65	160	140	2,5 kg	20
11	HS/HI	250	3,0	5106.1200.100	HIS 250-66.80-3TS	230V 50Hz	80	190	170	3,3 kg	32
12	HS/HI	250	3,0	5106.1200.101	HIS 250-66.85-34TS	230/240V 50Hz	85	190	170	3,3 kg	32


dimensions:

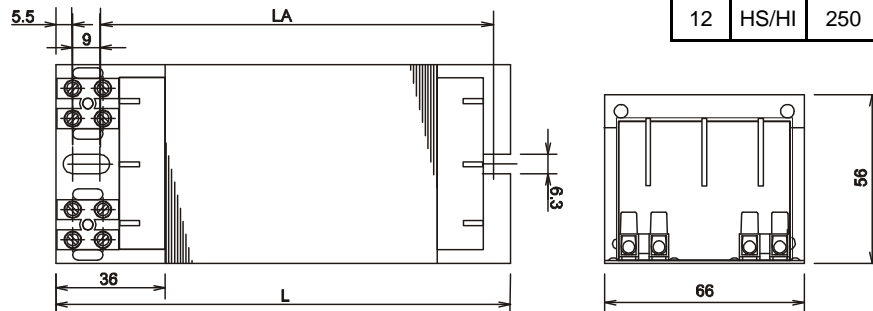

Technical changes are reserved

Special construction on request

wiring:

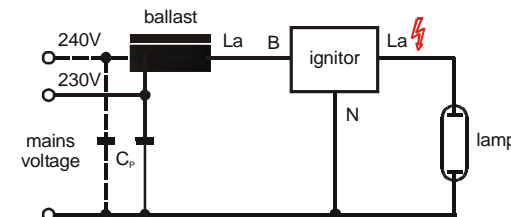

dimensioned drawing on request