



Series 5110 150 – 2000 W tw 130

Cross section (W x H) 105x90 mm

vacuum-impregnated

safety class I

EEI = A2

IP 20





EN 61347 - 2 -9

EN 60923

All types in various input voltages and 60 Hz version available on request

Technical facts

Pos.	Typ	lamp power	current	Ref.-No.	designation	ballast voltage	$\Delta T[K]$	L [mm]	LA [mm]	weight t
1	HI	150 W	1,8 A	5110.0370.201	HIS 150-105.55-3 (TS)	230V / 50Hz	55	135	120	3,2 kg
	HS	150 W								
2	HM	250 W	2,15 A	5110.0370.203	HIM 250-105.55-3 (TS)	230V / 50Hz	55	135	120	3,2 kg
	HI	250 W								
3	HI	250 W	3,0 A	5110.0370.202	HIS 250-105.65-3 (TS)	230V / 50Hz	65	135	120	3,2 kg
	HS	250 W								
4	HI	250 W	3,0 A	5110.0450.202	HIS 250-105.65-34(TS)	230-240V / 50Hz	65	135	120	3,7 kg
	HS	250 W								
5	HI	425 W	4,0 A	5110.0600.266	HIS 400-105.65-34(TS)	230-240V / 50Hz	55	135	120	4,7 kg
	HS	400 W								
6	HI	425 W	4,0A	5110.0600.267	HIS 400-105.65-3 (TS)	230V / 50Hz	55	135	120	4,7 kg
	HS	400 W								
7	HS	600 W	6,2 A	5110.0850.203	HS 600-105.75-3 (TS)	230V / 50Hz	75	135	120	6,5 kg

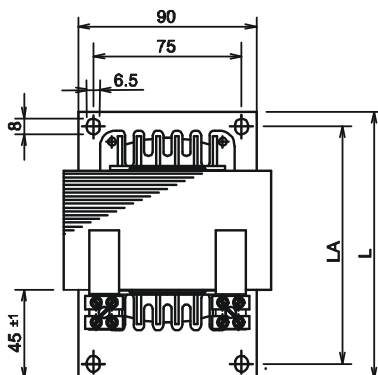

- overhead terminals
- screw terminal 2,5 mm²
- number of terminals depending on the model

- with self-resetting temperature switch for HI, HS
- Special construction on request



Series 5110 150 – 2000 W tw 130 safety class I
Cross section (W x H) 105x90 mm EEI = A2
vacuum-impregnated IP 20





EN 61347 - 2 -9
EN 60923

All types in various input voltages and 60 Hz version available on request

Technical facts

Pos.	Typ	lamp power	current	Ref.-No.	designation	ballast voltage	ΔT[K]	L [mm]	LA [mm]	weight t
8	HS	1000 W	10,3 A	5110.1650.067	HIS 1000-105.75-34	230-240V / 50Hz	85	230	188-205	11,5 kg
	HI	1000 W	9,5 A				75			
	HM	1000 W	7,5 A				65			
9	HS	1000 W	10,3 A	5110.1650.068	HIS 1000-105.75-3	230V / 50Hz	85	230	188-205	11,5 kg
	HI	1000 W	9,5 A				75			
	HM	1000 W	7,5 A				75			
10	HI	2000 W	8,8 A	5110.2400.061	HI 2000/8-105.75-37	380-400-420V / 50Hz	75	305	263-280	16,5 kg
11	HI	2000 W	8,8 A	5110.2400.072	HI 2000/8-105.75-41	400V / 50Hz	75	305	263-280	16,5 kg
12	HI	2000 W	8,8 A	5110.2400.064	HI 2000-105.80-37	380-400V / 50Hz	70	305	263-280	16,5 kg
	HI	2000 W	10,3A			380-400-420V / 50Hz	80			
13	HI	2000 W	10,3 A	5110.2400.073	HI 2000-105.80-41	400V / 50Hz	80	305	263-280	16,5 kg
14	HI-(HO)	2100 W	11,2 A	5110.2400.062	HI 2000/11-105.85-37	380-400-420V / 50Hz	85	305	263-280	16,5 kg
15	HI-(HO)	2100 W	11,2 A	5110.2400.074	HI 2000/11-105.85-41	400V / 50Hz	85	305	263-280	16,5 kg
16	HI-(HF)	2060 W	12,2 A	5110.2750.022	HI 2000/12-105.80-37	380-400-420V / 50Hz	80	340	298-315	19,0 kg
17	HI-(HF)	2060 W	12,2 A	5110.2750.023	HI 2000/12-105.80-41	400V / 50Hz	80	340	298-315	19,0 kg

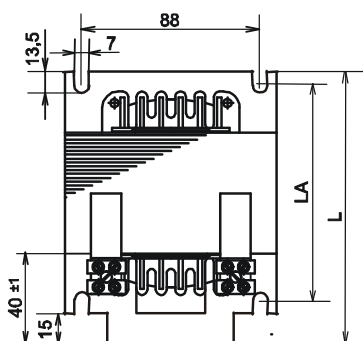

- overhead terminals
- screw terminal 2,5 mm²
- number of terminals depending on the model

- optional terminal mounted on the bottom
- Special construction on request